


DS-KAD6090E Two-Wire Controller



Key Features

- Built-in PLC chip
- Supports 100-meter transmission (18 AG/17 WAG)
- Supports 30-meter transmission (20 WAG)
- Supports providing power supply for 1 door station and 8 indoor stations simultaneously


Typical Application

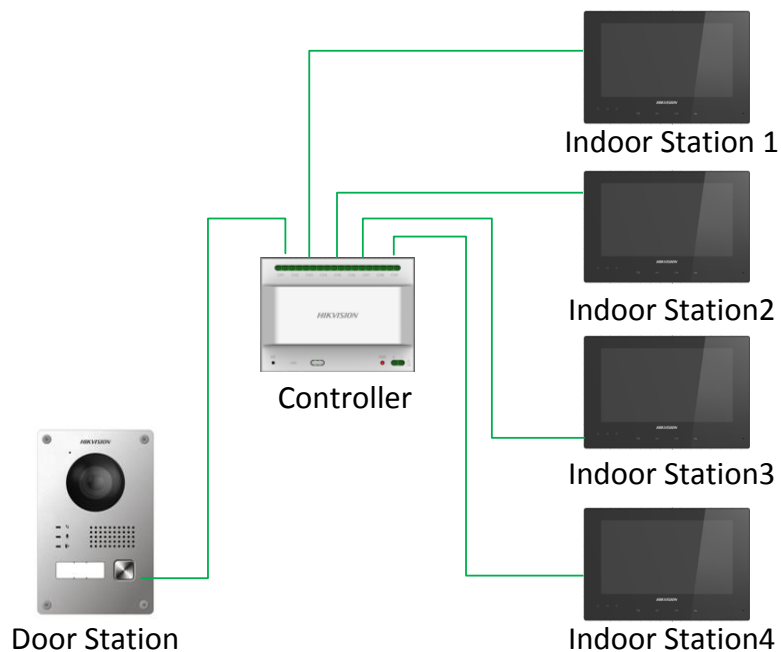

Specifications

Model	DS-KAD609-E	
General	Power supply	24 VDC
	Power consumption	60 W
	Interface	1 RJ-45 Interface 8 Two-Wire Interfaces
	Working temperature	-10° C to +55° C (14° F to 131° F)
	Working humidity	10% to 90%
	Installation	Wall Mounting
	Dimensions	112.2 mm x 111 mm x 66 mm (0.37" x 0.36" x 0.22")

Appearance

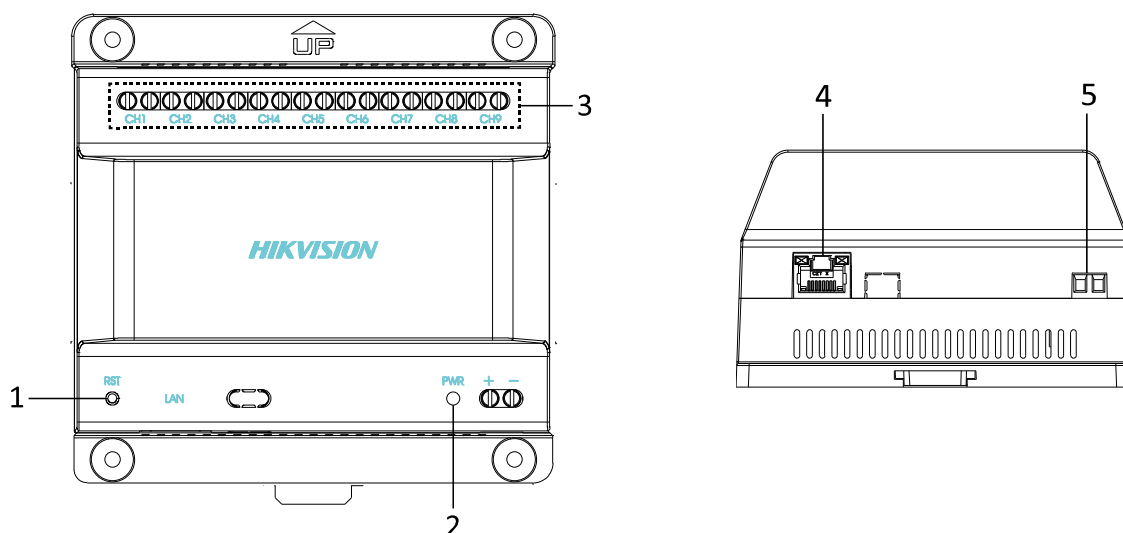

Index	Description	Index	Description
1	Reset Button	4	1 RJ-45 Interface
2	Power Indicator	5	Power Supply Interface
3	8 Two-Wire Interface		

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com